

Buy at Allstrap (866) 779-2673

POLI HT 32 (1 1/4")


PNEUMATIC STRAPPING TOOL WITH FRICTION WELD SEAL FOR PLASTIC PET STRAP — FLAT AND ROUND SURFACES

TECHNICAL DATA / APPLICATIONS :

Powerful, compact and easy to use strapping tool for heavy-duty industrial applications especially with high quality PET Polyester strapping is used and high tension is required.
Available standard in one strap size: 32 mm. (1 1/4").

Package type	Flat, round surface (min. diam. 700mm—28")
Strap type	PET
Strap width	32 mm (1 1/4")
Strap thickness	From 0.8mm up to 1.30mm / 0.031" - 0.051"
Max. Tension	6000 N — 1350 lbs
Air pressure and consumption	From 5,5 up to 6,5 bar MAX / 12 l/s (14 l/s welding)
Max. Tension speed	Around 6 mt/min
Joint type	Friction weld seal
Weight	Around 5,6 Kg / 12 lbs
Order code Poli HT 32	110.320.630

- ERGONOMIC
- MODERN DESIGN
- COMPACT AND LIGHT
- NEW BOSCH MOTORS
- ONE-PIECE STRAP INSERTION
- EASY TOOL REMOVAL

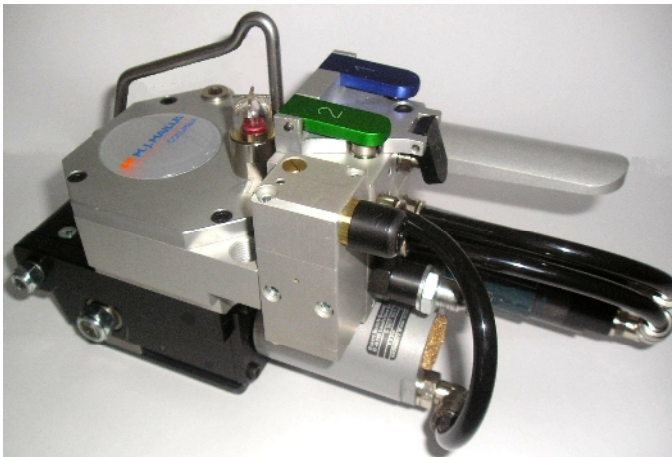

- HIGH STRAP TENSIONING
- ON REQUEST UPPER AIR CONNECTION CONFIGURATION

Buy at Allstrap (866) 779-2673

POLI HT 32 (1 1/4")


- EASY AND FAST ADJUSTMENTS

WELDING TIMER
ADJUSTMENT SCREW


LEVER 2— WELDING AND CUTTING
(GREEN):
PUSH TO START WELDING AND CUTTING

LEVER 1—TENSION (BLUE):
HOLD IT PUSHED UNTIL THE
RIGHT TENSION VALUE


LEVER 3- RELEASE (BLACK):
WHEN THE PRESSURE
INDICATOR IS DOWN, HOLD
IT PUSHED UNTIL THE STRAP
IS RELEASED

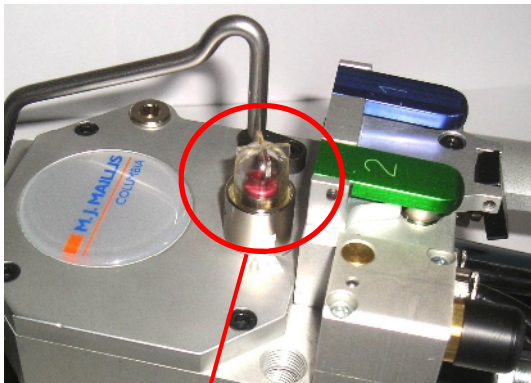

NEW WELDING TIMING
INDICATOR

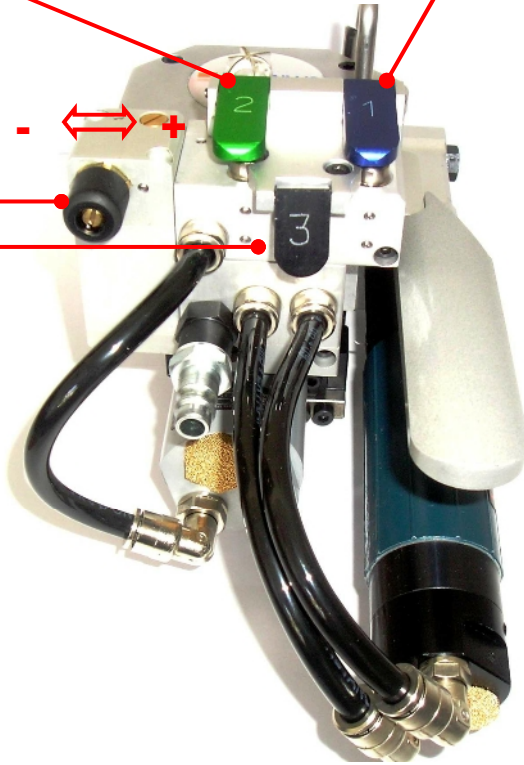

TURN THIS SCREW TO ADJUST THE MOTOR
POWER

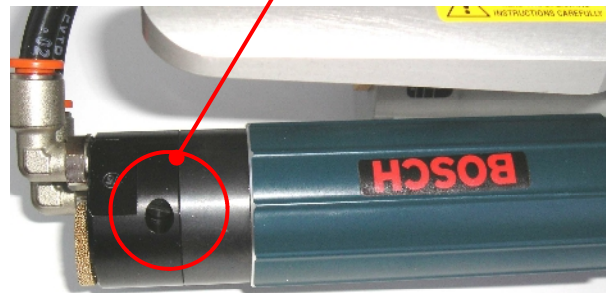


HT

Buy at Allstrap (866) 779-2673

POLI HT 32 (1 1/4")

- CONFIGURATIONS ON REQUEST

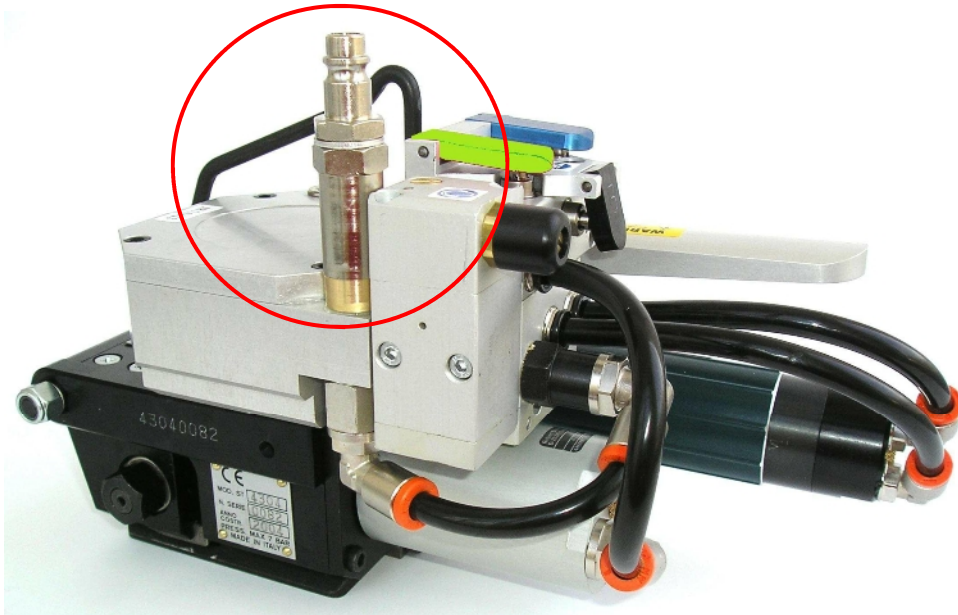

AN UPPER AIR CONNECTION IS PARTICULARLY USEFUL WHEN USED WITH A SPRING BALANCER. THIS OPTION IS AVAILABLE BUT MUST BE INDICATED WHEN ORDERING

ACCESSORIES

- FILTER + LUBRIFICATOR + PRESSURE ADJ GROUP CODE 601.010.830**
- SPIRAL LONG PIPE MT.15 WITH AIR CONNECTORS ON TIPS CODE 281.218.300**
- BALANCER 5-8,5 KG CODE 605.080.090**

OPTIONALS

- SUSPENSION BRACKET KIT 3 POSITIONS CODE 291.030.500**

